



Chapter 8: Finite Automata with Output

Two equivalent theoretical machines with output are introduced.

Dr. Nejib Zagula CSI3104-W11

1



Finite automata as mathematical models of computers

letters of words $\longleftrightarrow$ input
transitions $\longleftrightarrow$ execution of instructions (a program)
state $\longleftrightarrow$ contents of memory
? $\longleftrightarrow$ output

Dr. Nejib Zagula CSI3104-W11

2




- A Moore machine is a collection of 5 things:
 1. a finite set of states $q_0, q_1, q_2, \dots$, where q_0 is designated the start state
 2. an alphabet Σ of input letters
 3. an alphabet Γ of output characters
 4. a transition table that shows for each state and each input letter what state to go to next.
 5. an output table that shows what character is output (or printed) when entering a state.

(state, letter from Σ) $\xrightarrow{\text{transition}}$ state

Dr. Nejib Zagula CSI3104-W11


3

Example: states = $\{q_0, q_1, q_2, q_3\}$ $\Sigma = \{a, b\}$ $\Gamma = \{0, 1\}$

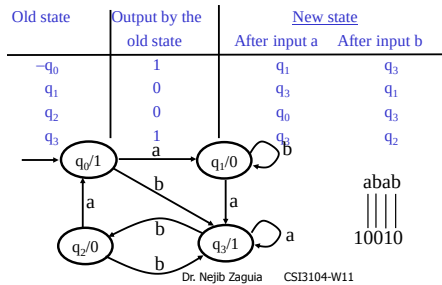

4

Example: A machine that counts 'aab's

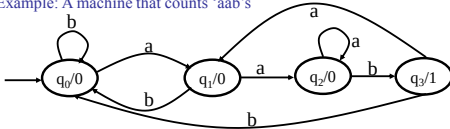

Input		a	a	a	b	a	b	b	a	a	b	b
State	q_0	q_1	q_2	q_2	q_3	q_1	q_0	q_0	q_1	q_2	q_3	q_0
Output	0	0	0	0	1	0	0	0	0	0	1	0

Printing 1 $\approx$ final state

words that end in aab

Dr. Nejib Zagula CSI3104-W11

5


■ A Mealy machine is:

1. a finite set of states $q_0, q_1, q_2, \dots$, where q_0 is designated the start state
2. an alphabet Σ of input letters
3. an alphabet Γ of output characters
4. a finite set of transitions that indicate, for each state and letter of the input alphabet, the state to go to next and the character that is output (printed).

state $\xrightarrow{\text{input/output}}$ state

Dr. Nejib Zagula CSI3104-W11


6

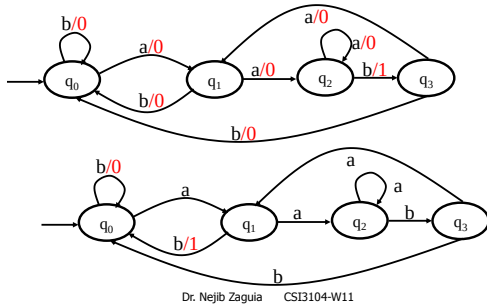

Dr. Nejib Zagula CSI3104-W11

7

Example




baaba
| | | |
01110

Dr. Nejib Zagula CSI3104-W11

8


Abbreviation:



Example: binary complement

$\Sigma = \{0,1\}$

$\Gamma = \{0,1\}$




101 001010
010 110101

Dr. Nejib Zagula CSI3104-W11

9

Example: an Increment Machine

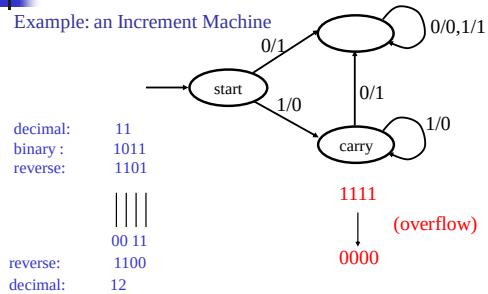

Dr. Nejib Zagula CSI3104-W11

10

Definition: Let M_0 be a Moore machine that prints x in the start state. Let M_e be a Mealy machine. The two machines are **equivalent** if for every input, whenever the output from M_e is w , the output from M_0 is xw .


Theorem: For every Moore machine, there exists a Mealy machine that is equivalent to it.

Proof: By constructive algorithm



Dr. Nejib Zagula CSI3104-W11

11

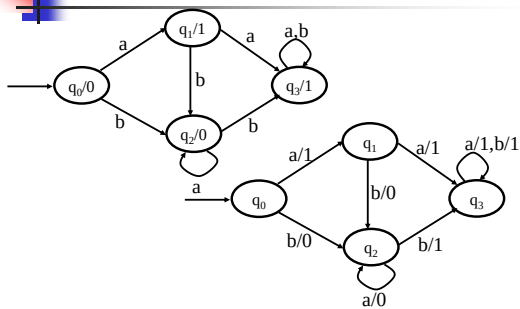

Dr. Nejib Zagula CSI3104-W11


12



Theorem: For every Mealy machine, there exists a Moore machine that is equivalent to it.

Proof: By constructive algorithm

One copy of the state for each letter in Γ that labels an arrow entering it.

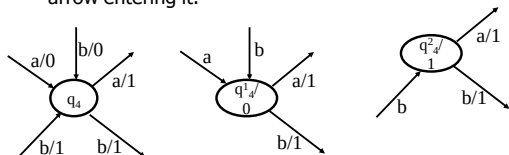


Dr. Nejib Zagula CSI3104-W11

13



We must consider

1. incoming edges
2. outgoing edges
3. loops

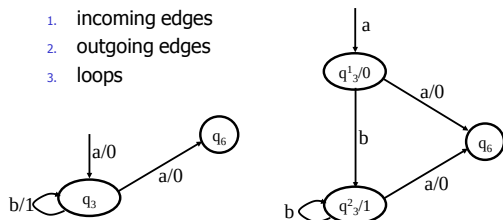


Dr. Nejib Zagula CSI3104-W11

14



If there is no entering arrow, choose any letter from Γ .




Choose any copy of q_0 as the start state.

Dr. Nejib Zagula CSI3104-W11

15



Chapter 8: Finite Automata with Output




Dr. Nejib Zagula CSI3104-W11

16



Chapter 8: Finite Automata with Output

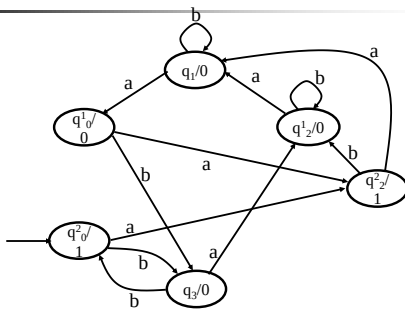

Dr. Nejib Zagula CSI3104-W11


17



Chapter 8: Finite Automata with Output



Example: Mealy Machine Describing a Circuit

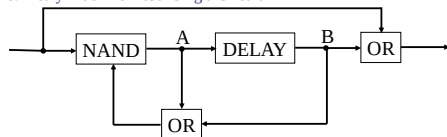

q_0 : A=0,B=0 q_1 : A=0,B=1 q_2 : A=1,B=0 q_3 : A=1,B=1

Transitions:

New B = old A

New A = input NAND (old A OR old B)

Output = input OR (old B)

Dr. Nejib Zagula CSI3104-W11


18



Chapter 8: Finite Automata with Output



Old state	Input 0		Input 1	
	new state	output	new state	output
q_0	q_2	0	q_2	1
q_1	q_2	1	q_0	1
q_2	q_3	0	q_1	1
q_3	q_3	1	q_1	1



Dr. Nejib Zagula CSI3104-W11

19



Chapter 8: Finite Automata with Output Automata Summary



	Finite Automata	Tr. Graphs	Generalized Tr. Graphs	non-determ automata	Moore Machines	Mealy Machines
start states	1	≥ 1	≥ 1	1	1	1
final states	≥ 0	≥ 0	≥ 0	≥ 0	0	0
labels on arrows	letters of Σ	words of Σ^*	Reg. Expr. over Σ	letters of Σ	letters of Σ	$i/o, i \in \Sigma, o \in \Gamma$
# of trans. from each state	1 transition for each letter of Σ	≥ 0	≥ 0	≥ 0	1 transition for each letter of Σ	1 transition for each letter of Σ
Deterministic?	Yes	No	No	No	Yes	Yes
Output?	No	No	No	No	Yes	Yes

Dr. Nejib Zagula CSI3104-W11

20
