
Statistical NLP: Lecture 8

Statistical Inference:
n-gram Models over Sparse Data
(Ch 6)

Overview

- Statistical Inference consists of taking some data (generated in accordance with some unknown probability distribution) and then making some inferences about this distribution.
- There are three issues to consider:
 - Dividing the training data into equivalence classes
 - Finding a good statistical estimator for each equivalence class
 - Combining multiple estimators

Forming Equivalence Classes I

- **Classification Problem**: try to predict the target feature based on various classificatory features. ==> **Reliability versus discrimination**
- **Markov Assumption**: Only the prior local context affects the next entry: (n-1)th Markov Model or n-gram
- Size of the n-gram models versus number of parameters: we would like n to be large, but the number of parameters increases exponentially with n.
- There exist other ways to form equivalence classes of the history, but they require more complicated methods ==> will use n-grams here.

Statistical Estimators I: Overview

- **Goal**: To derive a good probability estimate for the target feature based on observed data
- **Running Example**: From n-gram data $P(w_1, \dots, w_n)$ predict $P(w_{n+1} | w_1, \dots, w_n)$
- **Solutions we will look at**:
 - Maximum Likelihood Estimation
 - Laplace's, Lidstone's and Jeffreys-Perks' Laws
 - Held Out Estimation
 - Cross-Validation
 - Good-Turing Estimation

Statistical Estimators II: Maximum Likelihood Estimation

- $P_{MLE}(w_1, \dots, w_n) = C(w_1, \dots, w_n) / N$, where $C(w_1, \dots, w_n)$ is the frequency of n-gram w_1, \dots, w_n
- $P_{MLE}(w_n | w_1, \dots, w_{n-1}) = C(w_1, \dots, w_n) / C(w_1, \dots, w_{n-1})$
- This estimate is called **Maximum Likelihood Estimate** (MLE) because it is the choice of parameters that gives the highest probability to the training corpus.
- MLE is usually unsuitable for NLP because of the sparseness of the data ==> Use a **Discounting** or **Smoothing** technique.

Example

20 the green

1 the green an	1 the green His	1 the green room
1 the green areas	3 the green jungle	1 the green stud
1 the green bay	1 the green light	1 the green stuff
1 the green beneath	2 the green of	1 the green suite
1 the green demon	1 the green park	1 the green water
1 the green eyes	1 the green, past	

$$P(\text{jungle} | \text{the green}) = 3/20 = 0.15$$

$$P(\text{light} | \text{the green}) = 1/20 = 0.05$$

$$P(\text{sea} | \text{the green}) = 0/20 = 0$$

Table 4: A fragment of an ARPA-format bigram language model produced by the SLM Toolkit.

```

\data\
ngram 1=35770
ngram 2=444895

\1-grams:
-6.1177 <UNK> 0.0000
-99.0000 </s> -4.7968
-99.0000 <s> -0.6203
-1.5984 a -0.5293
-5.6405 aa -0.1468
-6.1177 aart -0.1528
-6.1177 aase -0.1524
-4.6863 ab -0.2796
-6.1177 aba -0.1528
-5.8166 aback -0.1521
-5.1176 abalone -0.2733
-6.1177 abalones -0.1437
.....
-5.1634 zumwalt -0.1309
-5.6405 zuniga -0.1463
-4.9415 zurich -0.4013
-5.6405 zurkuhlen -0.1290
-6.1177 zwentendorf -0.1528
-6.1177 zwhalan -0.1509
-6.1177 zydeco -0.1417
-6.1177 zz -0.1526
-5.4187 zzzz -0.6612

\2-grams:
-0.0000 </s> <s>
-2.8991 <s> </s>
-1.6152 <s> a
-5.3247 <s> aaron
-5.3247 <s> ab
-4.0924 <s> abc
-5.3247 <s> abdallah
.....
-5.3247 <s> zero
-5.3247 <s> zeros

-4.7315 <e> zinc
-4.7315 <e> zondervan
-5.3247 <e> zorinsky
-4.3076 <e> zzzz
-2.8960 a </s>
-2.7199 a a
-3.7359 a acre
-4.4540 a advance
-5.0472 a affecting
-4.0302 a affiliate
-5.0472 a after
-4.4540 a agreed
-4.0302 a agreement
.....
-2.6283 win because
-2.6283 win big
-1.7682 win but
-2.6283 win cars
-2.0351 win concessions
-2.6283 win confirmation
-2.6283 win congressional
.....
-0.8439 zurich </s>
-0.5840 zurich and
-1.7040 zurich based
-1.7040 zurich raised
-1.7040 zurich said
-0.8439 zurich switzerland
-1.7040 zurich to
-1.0050 zurkuhlen and
-1.0050 zurkuhlen of
-0.5279 zwentendorf austria
-0.5279 zwhalan an
-0.5279 zydeco a
-0.5279 zz top
-0.1069 zzzz best


\and\

```


Statistical Estimators III: Smoothing Techniques: *Laplace*

- $P_{LAP}(w_1, \dots, w_n) = (C(w_1, \dots, w_n) + 1) / (N + B)$, where $C(w_1, \dots, w_n)$ is the frequency of n-gram w_1, \dots, w_n and B is the number of bins training instances are divided into. ==> ***Adding One*** Process
- The idea is to give a little bit of the probability space to unseen events.
- However, in NLP applications that are very sparse, Laplace's Law actually gives far too much of the probability space to unseen events.

Example

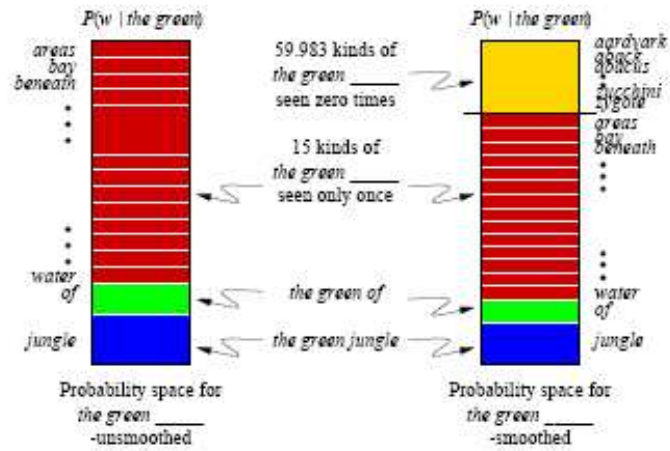

Example

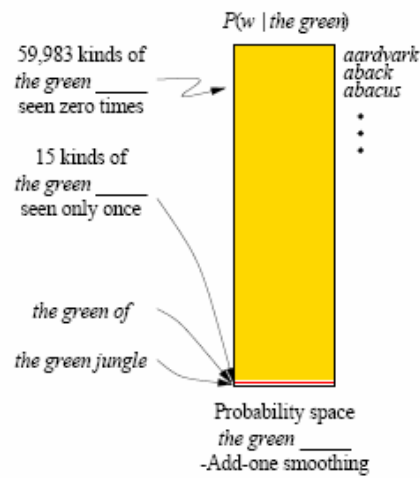

Statistical Estimators IV: Smoothing Techniques:Lidstone and Jeffrey-Perks

- Since the adding one process may be adding too much, we can add a smaller value λ .
- $P_{LID}(w_1, \dots, w_n) = (C(w_1, \dots, w_n) + \lambda) / (N + B\lambda)$, where $C(w_1, \dots, w_n)$ is the frequency of n-gram w_1, \dots, w_n and B is the number of bins training instances are divided into, and $\lambda > 0$. \implies **Lidstone's Law**
- If $\lambda = 1/2$, Lidstone's Law corresponds to the expectation of the likelihood and is called the **Expected Likelihood Estimation** (ELE) or the **Jeffreys-Perks** Law.

Statistical Estimators V, Robust Techniques:Held Out Estimation

- For each n-gram, w_1, \dots, w_n , we compute $C_1(w_1, \dots, w_n)$ and $C_2(w_1, \dots, w_n)$, the frequencies of w_1, \dots, w_n in training and held out data, respectively.
- Let N_r be the number of bigrams with frequency r in the training text.
- Let T_r be the total number of times that all n-grams that appeared r times in the training text appeared in the held out data.
- An estimate for the probability of one of these n-gram is: $P_{ho}(w_1, \dots, w_n) = T_r / (N_r N)$ where $C(w_1, \dots, w_n) = r$.

Statistical Estimators VI: Robust Techniques: Cross-Validation

- Held Out estimation is useful if there is a lot of data available. If not, it is useful to use each part of the data both as training data and held out data.
- **Deleted Estimation** [Jelinek & Mercer, 1985]: Let N_r^a be the number of n-grams occurring r times in the ath part of the training data and T_r^{ab} be the total occurrences of those bigrams from part a in part b. $P_{del}(w_1, \dots, w_n) = (T_r^{ab} + T_r^{ba}) / N(N_r^a + N_r^b)$ where $C(w_1, \dots, w_n) = r$.
- **Leave-One-Out** [Ney et al., 1997]

Statistical Estimators VI: Related Approach: Good-Turing Estimator

- If $C(w_1, \dots, w_n) = r > 0$, $P_{GT}(w_1, \dots, w_n) = r^*/N$ where $r^* = (r+1)N_r/r$
- If $C(w_1, \dots, w_n) = 0$, $P_{GT}(w_1, \dots, w_n) \approx N_1/(N_0N)$
- **Simple Good-Turing** [Gale & Sampson, 1995]:
- Use a smoothed estimate of the expectation of N_r .
- As a smoothing curve, use $N_r = ar^b$ (with $b < -1$) and estimate a and b by simple linear regression on the logarithmic form of this equation:
 $\log N_r = \log a + b \log r$, if r is large.
- For low values of r, use the measured N_r directly.

Good-Turing Smoothing (example)

- In the Brown Corpus, suppose for $n = 2$,
 $N_2=4000$ $N_3=2400$.
- Then $2^* = 3 (2400/4000) = 1.8$
- $P_{GT}(jungle/green) = 3^*/207 = 2.2/207 = 0.01062$

Good-Turing Smoothing (example)

- Probability mass left over for unseen events

$$\begin{aligned}
 &= 1 - \sum_{r=1}^{\infty} N_r(r^*/N) \\
 &= 1 - 1/N \sum_{r=1}^{\infty} (r+1)N_{r+1} \\
 &= 1 - 1/N(N - N_1) \text{ (because } \sum_{r=1}^{\infty} rN_r = N) \\
 &= N_1/N
 \end{aligned}$$

Divide this among $N_0 = N - \sum_{r=1}^{\infty} N_r$ kinds of unseen events

$C(W_{1,n}) = r = 0$, then

$$P_{GT}(W_{1,n}) = \frac{N_1}{NN_0} = 0^*/N = r^*/N$$

- $P_{GT}(lantern | green) = 0^*/207 = N_1/207N$

Combining Estimators I: Overview

- If we have several models of how the history predicts what comes next, then we might wish to combine them in the hope of producing an even better model.
- Combination Methods Considered:
 - Simple Linear Interpolation
 - Katz's Backing Off
 - General Linear Interpolation


Combining Estimators II: Simple Linear Interpolation

- One way of solving the sparseness in a trigram model is to mix that model with bigram and unigram models that suffer less from data sparseness.
- This can be done by linear interpolation (also called finite mixture models). When the functions being interpolated all use a subset of the conditioning information of the most discriminating function, this method is referred to as deleted interpolation.
- $P_{li}(w_n|w_{n-2}, w_{n-1}) = \lambda_1 P_1(w_n) + \lambda_2 P_2(w_n|w_{n-1}) + \lambda_3 P_3(w_n|w_{n-1}, w_{n-2})$ where $0 \leq \lambda_i \leq 1$ and $\sum_i \lambda_i = 1$
- The weights can be set automatically using the Expectation-Maximization (EM) algorithm.

Combining Estimators II: Katz's Backing Off Model

- In back-off models, different models are consulted in order depending on their specificity.
- If the n-gram of concern has appeared more than k times, then an n-gram estimate is used but an amount of the MLE estimate gets discounted (it is reserved for unseen n-grams).
- If the n-gram occurred k times or less, then we will use an estimate from a shorter n-gram (back-off probability), normalized by the amount of probability remaining and the amount of data covered by this estimate.
- The process continues recursively.

Katz's Backing Off Model (3-grams)

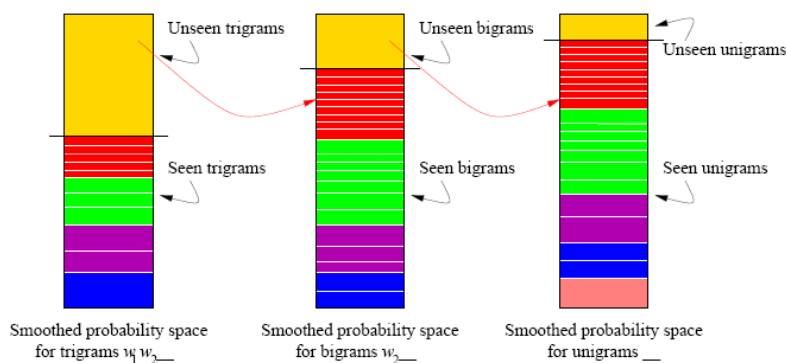

$$P_{BO}(w_3 | w_1 w_2) = \begin{cases} P_S(w_3 | w_1 w_2) & \text{if } C(W_{1,3}) > k \\ \alpha(w_1 w_2) P_S(w_3 | w_2) & \text{if } C(W_{1,3}) \leq k \text{ and } C(W_{2,3}) > k \\ \alpha(w_2) P_S(w_3) & \text{otherwise} \end{cases}$$

Katz's Backing Off Model (2-grams)

- For bigrams:

$$P_{BO}(w_2|w_1) = \begin{cases} P_S(w_2|w_1) & \text{if } C(w_1w_2) > k \\ \alpha(w_1)P_S(w_2) & \text{otherwise} \end{cases}$$
$$\alpha(w_1) = \frac{1 - \sum_{w_2: C(w_1w_2) > 0} P_S(w_2|w_1)}{1 - \sum_{w_2: C(w_1w_2) > 0} P_S(w_2)}$$

Combining Estimators II: General Linear Interpolation

- In simple linear interpolation, the weights were just a single number, but one can define a more general and powerful model where the weights are a function of the history.
- For k probability functions P_k , the general form for a linear interpolation model is:
$$P_{li}(w|h) = \sum_i^k \lambda_i(h) P_i(w|h) \quad \text{where } 0 \leq \lambda_i(h) \leq 1 \text{ and } \sum_i \lambda_i(h) = 1$$